

FK11R-35T






FK11R-35T

Total Weight:	4500kg
Rated capacity:	3.5 ton
rated power:	36.8/2500kw/rpm

Customizable



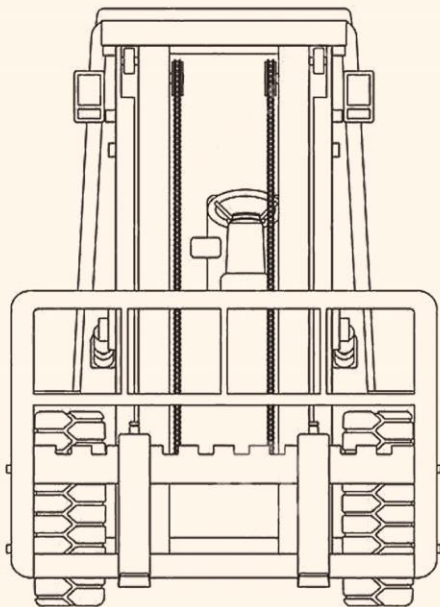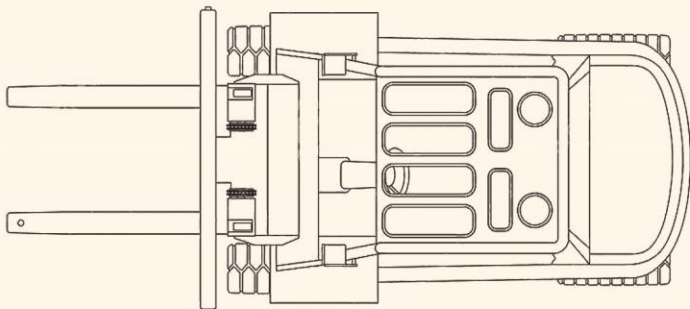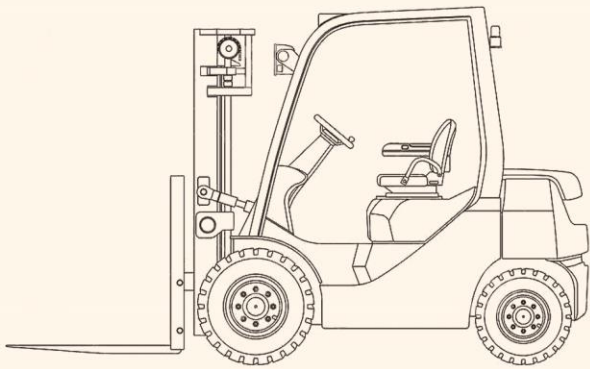

► Technical specifications

Basic parameters

Rated capacity:	3.5 ton
Total Weight:	4500 kg
Load center:	500mm

Performance parameter

Lift height:	3000mm
Free lift height:	130mm
Fork size(L*W*T):	1070×125×45mm
Fork outside spread(Min./Max.):	300/1200mm
Front overhang:	490mm
Mast lowered height:	2095mm
Mast extended height:	4180mm
Overhead guard height:	2130mm

Job parameters

Turning radius:	2510mm
Min. right angle aisle width:	2200mm
Travel speed (unload/full load):	20/18.5km/h
Lift speed (unload/ full load):	480mm/s
Max. gradeability:	20%
Front wheel:	7.00-12-12PR
Rear wheel:	6.00-9-10PR

Length to face of fork

Without of fork:	2730mm
With fork:	3800mm
Wheel width:	1225mm

Other parameters

Wheel base:	1700mm
Engine Rated output:	36.8/2500kw/r.p.m
Engine Rated torque:	156/1700-1900n.m/r.p.m
Engine Displacement:	2670cc
Engine No. of cylinder:	4
Engine Bore×stroke:	90*105mm
Shift (FWD/RVS):	2/2
Operating pressure:	17.5
Transmission Model:	Hydraulic

安徽福客重工有限公司
Anhui Fuke Heavy Industry Co., Ltd.

website: <https://construction-equip.com>
whatsapp: +8613505697380
Address: Room 405, Building B-4, East Side
of Dazhong Road, Cuozhen Town, Feidong
County, Hefei City, Anhui Province

whatsapp: +8613505697380

Email: fuke7380@gmail.com