



Basic Configuration

Bucket capacity

3.8-5.0m³

Operation weight

26000kg

Rated weight

8000kg

Wheel base

3500mm

*We follows the principle of continuous improvement Product performance parameters will be partially changed due to technical improvements without prior notice.

Anhui Fuke Heavy Industry Equipment Co., Ltd.

Web: www.fukeonline.com

Basic Parameters

Rated capacity: 3.8-5.0m³

Rated weight: 8000Kg

Operating weight: 26000Kg

Max. breakout force: 260KN

Total time: ≤13s

Max. dump height: 3350mm

Dump distance: 1280mm

Wheel base: 3500mm

Thread: 2200mm

Overall dimensions (length*width*height):

8860×3300×3700mm

Model of engine: DF CUMMINS 6LTAA8.9-C295

Pattern: Turbocharger, vertical, water-cooled, 4-stroke, direct injection

Max. torque: 1350Nm

Rated power: 220KW

Specified rotational speed: 2100r/min

Pattern: 4-element, single stage

Transmission type: ZF4WG260

Number of gear: 4 forward, 3 reverse

Max. travel speed: 36km/h

Axle: Home-made Wet Axle



Main reducer type: Spiral bevel gear first reduction

Pattern of wheelside moderation: Single stage planetary

Tire size: 26.5-25

Pattern: Full hydraulic steering system

Loader Outline

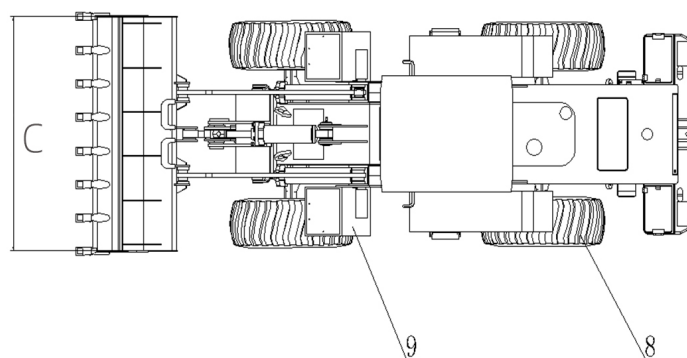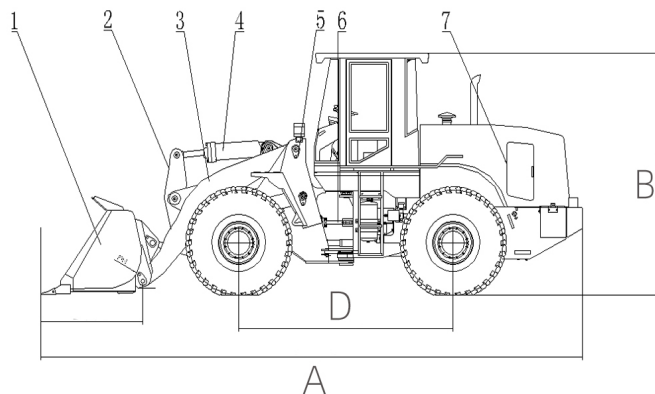

Accessories



*We follows the principle of continuous improvement Product performance parameters will be partially changed due to technical improvements without prior notice.

Contact us:

Sun Xianfeng - Phone/Whatsapp:+8613505697380 |

Email:fk002@fukebn.com/fuke7380@gmail.com |

Mr.Zhang - Phone/Whatsapp:+8613291848418 | Email:zh@fukebn.com

Web:

www.fukeonline.com

